

antonbauer®

One World. One Smart Choice.™

CINE VCLX/2 BATTERY

Owner's Manual



TABLE OF CONTENTS

1	IMPORTANT INTRODUCTION
2-3	FEATURES CHARGING WITH CINE VCLX/2 CHARGER CHARGING WITH CINE VCLX CHARGER
4	RealTime® LCD LOW BATTERY WARNINGS
5	GUIDELINES FOR OPTIMUM PERFORMANCE AND MAXIMUM LIFE SERVICE SPECIFICATIONS
6	LIMITED WARRANTY

IMPORTANT

The CINE VCLX/2 Battery can only be charged with the CINE VCLX/2 or a CINE VCLX charger. DO NOT attempt to charge this battery with any other charger.


The CINE VCLX/2 battery represents the latest in battery technology. Nickel Metal Hydride (NiMH) is similar to NiCad batteries in most characteristics. However, NiMH has more sensitive charging and discharging parameters and requires a longer charge time for optimum performance. The charge time is approximately 3 hours with the CINE VCLX/2 charger or 7 ½ hours with the CINE VCLX charger.

INTRODUCTION

The development of the **CINE VCLX/2** battery system has been made possible by advancements in a cell technology. These nickel metal hydride cells provide the highest energy density cell available. The high performance of the new batteries is assured through the incorporation of the pioneering InterActive technology of the Anton/Bauer Digital system. The battery is equipped with an on board “fuel computer” which monitors energy put into and taken out of each battery, as well as critical operating characteristics and conditions. This data is communicated to the InterActive charger to ensure safe and optimize reliable performance.

In addition, remaining battery capacity information is available to the operator by means of the RealTime™ LCD display on the battery.

This battery surpasses the traditional “block battery”, which is the most common battery used to power film cameras, by having an extraordinary power rating of 280 watt hours or 19 ampere hours. The simultaneous 28v (regulated) and 14.4v (nominal) outputs allows powering of multiple pieces of equipment at the same time. Also, a regulated 28v output allows you to power virtually any film camera from a MovieCam to an ARRI 435.

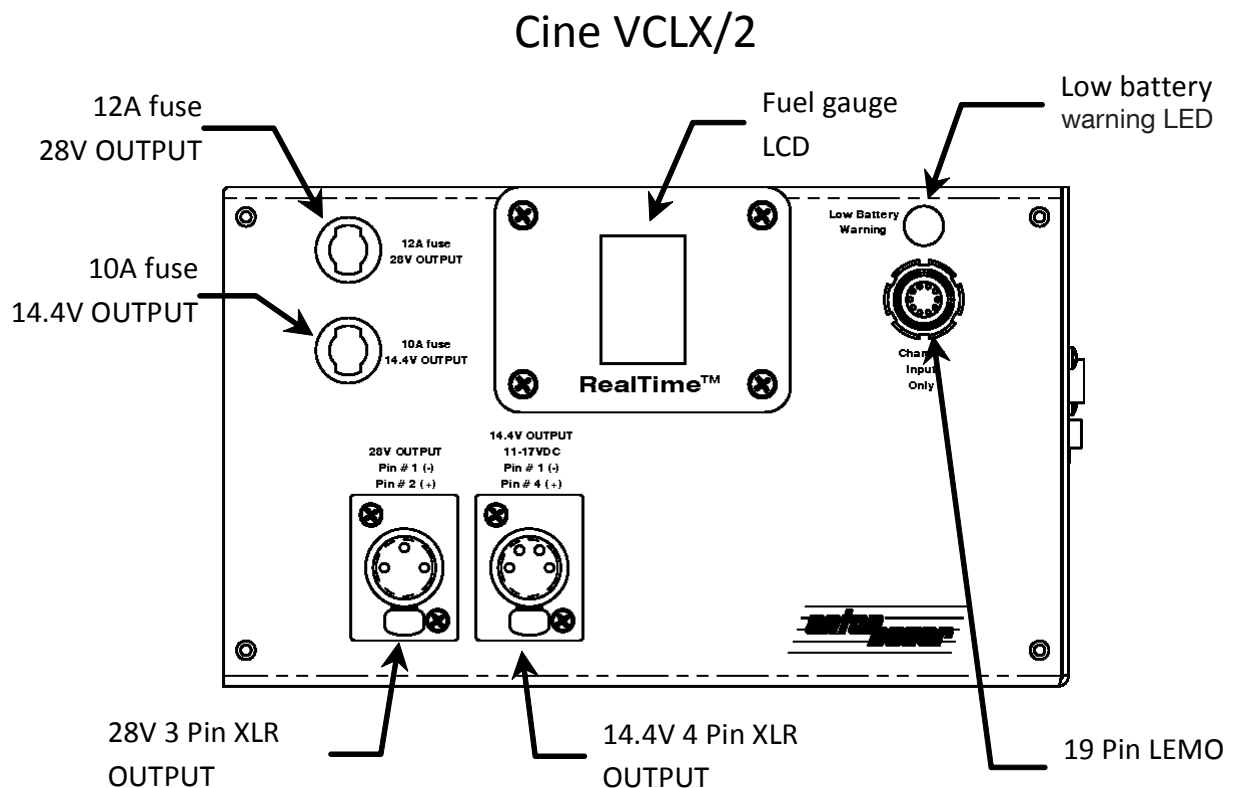

FEATURES


1. **Microprocessor Fuel Computer** - Accurately monitors the energy put into and taken out of the battery. This data is processed with sophisticated programs that take into account battery age, self discharge, charge/discharge rate, cell imbalance and previously experienced charge/discharge cycles. The CINE VCLX/2 battery constantly "learns" its precise state of charge and remaining capacity. This data is automatically transmitted to the charger.
2. **Integral RealTime®LCD'** - Accurately displays the percentage of remaining battery capacity at all times.
3. **Multi-Voltage Output** - The multi-voltage output, both 14.4 volt and 28 volt makes this battery unique, making it the perfect application for most film cameras.
4. **High Current Output** - Allows for 10 amp current drawn from 14.4 volt outputs and 12 amp draw from 28 volt output.
5. **Case design** - The high quality design of the CINE VCLX/2 battery protects the cells from impact and normal operating use.
6. **Individual Computer Testing** - Like all professional Anton/Bauer batteries, this battery has been individually computer tested, for assurance of optimum capacity, voltage and overall quality.
7. **Low Voltage Cut-Off** - The CINE VCLX/2 battery has a low voltage cut-off to protect against damage to the battery. The low voltage cut-off is set to 12 volts.

CHARGING WITH THE CINE VCLX/2 CHARGER

Charge this battery fully before using. Allow the battery to reach a steady green mode before using. Charging is automatic. The flashing red and green lights indicate the charger and battery are establishing communications. Simply plug the 19p LEMO connector from the CS-GBC cable into the battery and the other end into the charger. Note: It is recommended that the charger first be plugged into AC mains and then attach the battery for charging.

The following are the standard indications on any Anton/Bauer charger:

- Alternating red and green: Evaluating battery and/or rejuvenating low voltage battery.
- Steady red: Battery holding for temperature stabilization
- Flashing red: Charging
- Steady green: Lifesaver® or equalize mode. Batteries will remain charge and ready for use indefinitely
- Flashing green: Full battery installed verifying charge state.

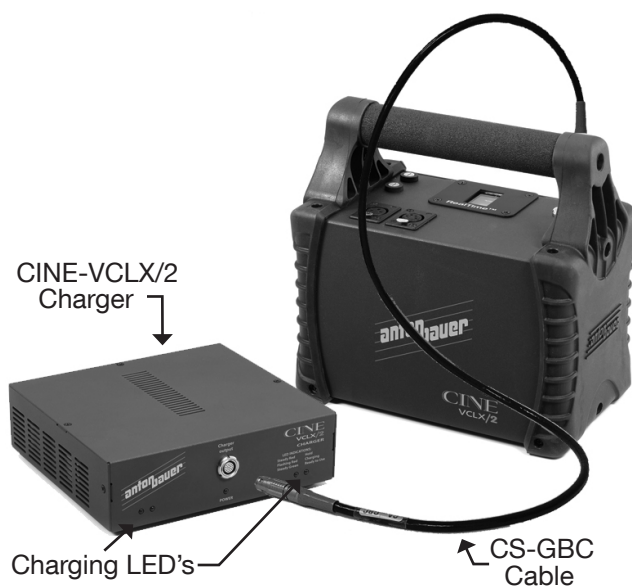


CHARGING WITH THE CINE VCLX CHARGER

Charge this battery fully before using. Allow the battery to reach a steady green mode before using. Charging is automatic. The flashing red and green lights indicate the charger and battery are establishing communications. Simply plug the 19p LEMO connector from the CS-GBC cable into the charger and then plug the other end (19p LEMO connector) into the battery. Note: it is recommended that the charger first be plugged into AC mains and then attach the battery for charging.

The following are the standard indications on any Anton/Bauer charger:


- Alternating red and green: Evaluating battery and/or rejuvenating low voltage battery.
- Steady red: Battery holding for temperature stabilization
- Flashing red: Charging
- Steady Green: Lifesaver® or equalize mode. Batteries will remain charge and ready for use indefinitely

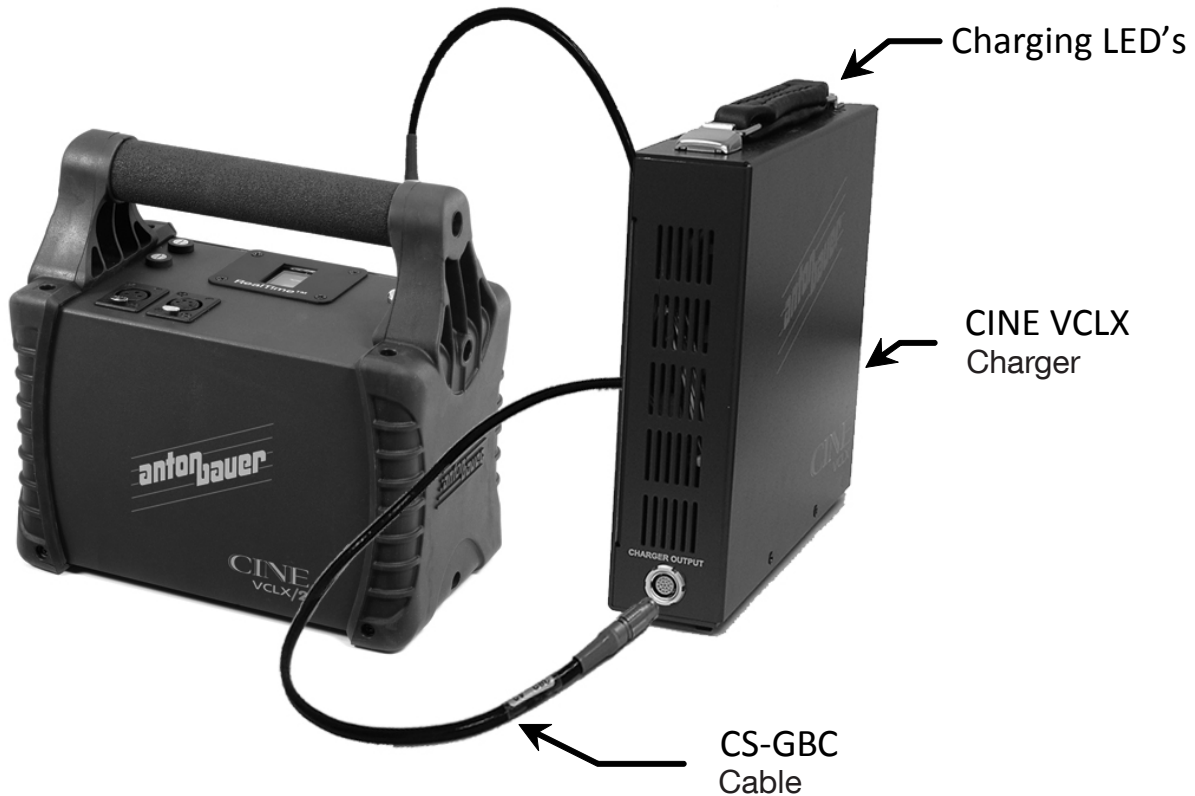

REALTIME LCD

The CINE VCLX / 2 features a “RealTime” LCD providing “on-the-fly” remaining run time estimates in 15 minute increments as well as *simultaneously* providing remaining capacity information using the traditional “Fuel Gauge” approach. No special adapters or set up is required. RealTime *automatically calculates the load and displays capacity information and battery status at all times.*

Special electronics protect the NiMh cells in the battery from damage and to ensure safe operation. These electronics work in conjunction with the battery electronics and will give the operator additional indications in the RealTime display of the battery’s status as outlined below.

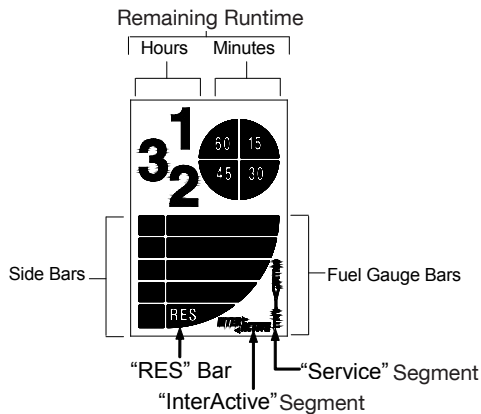

-The large numbers **1, 2 or 3** indicate remaining hours under current load (only one number will display at anyone time).

-The pie chart numbers (**15, 30, 45, or 60**) indicate remaining minutes under current load.

-The InterActive® Segment indicates a **FULLY CHARGED** battery verified by charger communication.


1. **“INTERACTIVE” SEGMENT:** When illuminated, it indicates the battery has completed its full charge routine.
2. **“RES” Bar:** Is the last “Fuel Gauge” Bar and will start to flash at 6% capacity and will continue to flash until EOD (End Of Discharge) is reached.
3. **“SERVICE” SEGMENT:** Indicates self-diagnostic functions have detected anomalies. A battery with a “Service” flag should be returned to the Anton/Bauer Service Department
4. **“SIDE BAR” SEGMENTS:** Will remain ON unless a calibration charging routine is required

If the SIDE BARS (only) flash, AND other icons are lit and not flashing, this indicates the battery has requested to be fully charged and discharged in order to update its “learned capacity”. This “learning” should typically occur during normal equipment operation. However, if the battery has not been fully charged and discharged for some time, this indication will appear. To remove the flashing SIDE BARS, fully charge the battery (Interactive indication) on the battery. Then discharge the battery on a camera in normal operation continuing to keep the camera “hot” until it shuts down. Then return the battery to the charger. When the battery is full remove it from the charger.

IMPORTANT NOTE: The flashing SIDE BARS indication is not a warning indication. The battery will operate perfectly normal while awaiting a “learning” cycle. Rather than relying on an “assumed” capacity, as with some imitation fuel gauges, the battery relies on the Digital Battery electronics to update capacity information as the battery sees different operating conditions and ages normally. The flashing bars are merely an indication that the battery has not updated this information for some time and is requesting a confirmation of its “learned” capacity.

LOW BATTERY WARNING

The red LED on the top of the battery, next to the 19 Pin LEMO charging connector, will flash when the battery has approximately 15 minutes of runtime remaining. The microprocessor, internal to the battery, will calculate the load applied, and determine when there is 15 minutes or less, of runtime remaining.

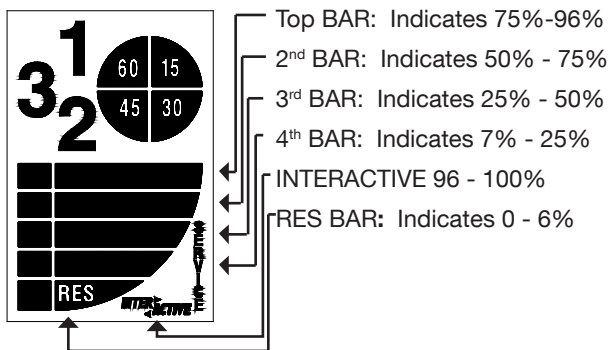

GUIDELINES FOR OPTIMUM PERFORMANCE AND MAXIMUM LIFE

1. Keep batteries cool or at room temperatures whenever possible. Sustained elevated temperatures are the primary reason for premature failure of NiMH batteries:
 - a. Charging - Charge batteries at room temperature. In warm climates keep chargers in air conditioned rooms that are maintained between 65°F to 85°F for best performance.
 - b. In the Field - Do not leave batteries in a hot vehicle trunk or out in direct sunlight unnecessarily.
 - c. Storage - If batteries are not going to be used for several months, they should be fully discharged, sealed in a plastic bag and stored in a refrigerator.
2. Use only an Anton/Bauer CINE VCLX or CINE VCLX/2 Charger and keep the battery on the charger until just prior to being used.
3. Return battery to the charger as soon as possible after use preferably within 24 hours.
4. **Do not over-discharge batteries** - It is quite proper to discharge a battery until a low voltage warning in the camera or VTR is observed. However, a switch to a fresh battery should occur as soon as possible following such indication
 - a. A CINE VCLX/2 battery should be changed as soon as possible after a “flashing ‘RES’ segment” or Red flashing LED is indicated.
 - b. Never leave a battery operated device unattended while it is running.
 - c. DO NOT LEAVE A BATTERY ATTACHED TO A CAMERA/CAMCORDER during transit or storage. “Keep warm” circuitry in the camera can over discharge the battery.
5. Routine use of a battery at discharge rates greater than the battery rating can reduce overall service life.
6. Discharging the battery for diagnostic purposes should only be performed on an occasional basis (once every 6-8 weeks at most). Unnecessary discharging only detracts from overall life.

Anton/Bauer publishes a comprehensive “Video Battery Handbook” to help you further understand the care and use of batteries. This guide is available at no charge by contacting Anton/Bauer at 1-800-422-3473 or 203-929-9935 or www.antonbauer.com

SERVICE

In the unlikely event a CINE VCLX/2 battery fails to deliver acceptable performance, it must be returned to the Anton/Bauer Customer Support Group, the only facility qualified and equipped to service the CINE VCLX/2 batteries and calibrate the electronic components and sensors. Any attempt by the user or any other unauthorized persons to service this battery will surely result in improper calibration of the electronic components resulting in severe battery damage and/or safety hazards to the operator, in addition to voiding any/all remaining unconditional or pro-rated warranty conditions.

THEREFORE:

1. **DO NOT** attempt to service this battery under any circumstances.
2. **DO NOT** send this battery for service to anyone other than the Anton/Bauer Customer Support Group.
3. **DO NOT** re-cell this battery - At the end of its useful life contact the Anton/Bauer Customer Support Group. This battery is unable to be re-celled due to proprietary circuitry that protects the battery. Contact Anton/Bauer to inquire about “Battery Modules” which are available for your battery.

SPECIFICATIONS

OUTPUT VOLTAGE	14.4v Nominal (12-16.8v Operating) 28v Regulated
CAPACITY (CELL CAPACITY)	280 WH Nominal (19 AH Rated)
FUSE	10A at 12 volts (external) 12A at 28 volts (external)
RECOMMENDED OPERATION (MAXIMUM DISCHARGE RATE)	100 watts (250 watts)
TYPICAL RUN-TIME @ 14.4V	@ 100w – 2 ¾ hrs. @ 150w – 1 ¾ hrs. @ 300w < 1 hrs.
TYPICAL RUN-TIME @ 28V	@ 50w – 5 ½ hrs. @ 100w – 2 ¾ hrs. @ 250w – 1 hrs.
WEIGHT	15 lbs

LIMITED WARRANTY

0-12 MONTHS - "Anton/Bauer will repair or replace the product at Anton/Bauer's option - FREE OF CHARGE."

This limited warranty for the product specified in this document is given by Anton/Bauer, Inc. ("Anton/Bauer"), 14 Progress Drive, Shelton, Connecticut 06484. If you have any questions regarding product applications, product specification, or to obtain warranty service on this or any Anton/Bauer product, contact the Anton/Bauer Customer Support Group or the company at the address above.

IMPORTANT: WARRANTY REGISTRATION CARD MUST BE MAILED WITHIN 30 DAYS OF PURCHASE TO QUALIFY FOR THIS WARRANTY. Warranty registration, including the serial numbers of Anton/Bauer chargers used with this Product, must be supplied to Anton/Bauer. Anton/Bauer will warranty the Product only against defects in material and workmanship for a period of (see above) years from the date of purchase, in accordance with the terms set forth below, and then, only if the Product is used only in conjunction with compatible Anton/Bauer chargers. If this battery is returned to Anton/Bauer for warranty service it will be required that the user provide model names and serial numbers of compatible Anton/Bauer chargers with which this product was used.

THIS PRODUCT MAY ALSO BE REGISTERED ON LINE AT www.antonbauer.com.

This warranty shall be effective only if Anton/Bauer receives notice of such defects in materials or workmanship during the period of the warranty. Minimum battery capacity is defined, under this warranty, as 60% of nominal specified capacity for this product at time of purchase. The liability of Anton/Bauer hereunder is expressly limited to a claim for repair or replacement of the Product or as otherwise stated herein at Anton/Bauer's sole discretion. Notice of any claim under this warranty shall be delivered to Anton/Bauer during the period of the warranty and the Product should be returned with its packaging promptly, at purchaser's expense, to an Anton/Bauer Customer Support Center or to the address above. Upon receipt of the Product and a record of your compliance with the conditions of this warranty, Anton/Bauer will repair or replace the Product and return it to you, or issue a credit, as applicable.

THIS WARRANTY DOES NOT APPLY TO AND IS VOID IN THE CASE OF DEFECTS OR DAMAGE RESULTING FROM ACCIDENTS, DISASTER, NEGLIGENCE, MISUSE, IMPROPER INSTALLATION, IMPROPER OR UNAUTHORIZED SERVICE OR MAINTENANCE, UNAUTHORIZED REPLACEMENT PARTS OR ATTACHMENTS; OR DYSFUNCTION OR MALFUNCTION OF, OR CAUSED BY, ANY OTHER PRODUCT OR DEVICE. Misuse includes any use of the Product in other than its intended application, including the use of this Product with any charging device or

accessory not manufactured by and/or specified by Anton/Bauer. This warranty does not cover, and Anton/Bauer assumes no responsibility for, any equipment or devices used in conjunction with the Product.

ANTON/BAUER DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY WRITTEN OR IMPLIED WARRANTY OF THE PRODUCT. UNDER NO CIRCUMSTANCES WILL ANTON/BAUER BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

This Warranty is to be construed and enforced in accordance with the law of the State of Connecticut, including the provisions of the Uniform Commercial Code as adopted and from time to time amended in the State of Connecticut, and not the Convention for the International Sale of Goods. This choice of Connecticut law is exclusive of any Connecticut law that would require reliance on any law foreign to Connecticut. Should any action of law or in equity be brought by any person under this Warranty, such action shall be brought only in the United States District Court for the District of Connecticut, or in any Superior Court in Fairfield County, Connecticut, U.S.A. Some states do not allow limitations on how long a warranty lasts, so the time period limitation herein may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may have other legal rights which vary from state to state.

Use of unauthorized equipment in conjunction with Anton/Bauer products constitutes misuse under our warranties and may limit or void those warranties. Anton/Bauer does not authorize, condone, recommend, or otherwise assume any liability or responsibility resulting from the use of any battery, charger or accessory made by Anton/Bauer manufacture with any battery, charger or accessory not manufactured, produced or sold by Anton/Bauer. Anton/Bauer only authorizes the use of original Anton/Bauer product with this product. Use only original Anton/Bauer equipment with this product.





Ni-MH



The EPA certified RBRC® Battery Recycling Seal on the Nickel Metal Hydride (Ni-MH) battery indicates Anton/Bauer is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful life, when taken out of service in the United States or Canada. The RBRC® program provides a convenient alternative to placing used Ni-MH batteries into the trash or the municipal waste stream, which may be illegal in your area. Please call 1-800-8-BATTERY™ for information on Ni-MH battery recycling and disposal bans/restrictions in your area. Anton/Bauer's involvement in this program is part of our commitment to preserving our environment and conserving our natural resources.

For recycling information outside the United States and Canada, contact Anton/Bauer®.

The following are trademarks of Anton/Bauer, Inc.:

Anton/Bauer, Anton/Bauer logo and parallelogram design, Aspekt, Automatique, DataTap, DIONIC, Elipz, Egripz, Elightz, Essentialz, Gold Mount, HubZ, HyTRON, Impac, Interactive and design, LifeSaver, Logic Series, Logic Series Logo, Maxx man logo design, Nexus, PowerStrap, Proformer, Probe, ProPac, RealTime, Satelight, Snap-On, Stasis, Stasis Flex, Tandem, TrimPac, Ultrakit, Ultralight, "One World. One Smart Choice", "The power behind the best cameras capturing the best images in the world.", "The quality standard of the video industry", "The worldwide standard", and "There should always be choices. It makes it easier to recognize the best."

Lexan is a registered trademark of G.E. Company Corp.

Cordura is a registered trademark of E.I. duPont de Nemours

Anton/Bauer, Inc.

World Headquarters
14 Progress Drive, Shelton, CT U.S.A.
Tel (203) 929-1100 or (800) 541-1667
Fax (203) 929-9935
support@antonbauer.com

Anton/Bauer Europe, B.V.

Eurode Business Center, Eurode - Park 1-2
6461KB Kerkrade, The Netherlands
Tel (+31) 45 5639220
Fax (+31) 45 5639222
eurosupport@antonbauer.com

Anton/Bauer, Inc. - Singapore Office

6 New Industrial Road, # 02-02 Hoe
Huat Ind. Bld., Singapore 536199
Tel (+65) 62975784
Fax (+65) 62825235
asia@antonbauer.com

www.antonbauer.com

