



SOHORAID ST4-TL3+B



4-Bay 2.5"/3.5" SATA III HDD/SSD Hardware RAID Storage with 10Gbps Lan Port

ST4-TL3+ comes with dual Thunderbolt™ 3 (USB-C) (40Gbps) and one RJ45 (10Gbps) interfaces, can support both hardware RAID and software RAID! Embedded one Hardware RAID chip inside, ST4-TL3+ provides RAID 0/1/10 and JBOD function. User can set the RAID level easily depending on the application with user friendly Graph User Interface (GUI). If using JBOD mode, user can set software RAID groups by the Operation System such like Windows or macOS, or by the software provides by the 3rd party. ST4-TL3+ provides one standard RJ45 LAN port which transmission rate supports up to 10Gbps, to provide stable network access for notebook, eliminating the need to purchase a 10Gbps LAN adapter. At the rear side, ST4-TL3+ has one Mini Display port for user to connect 2nd monitor for monitor extension.

Features

1. 2 x Thunderbolt™ 3 (up to 40Gbps/port)
2. 1 x RJ45 LAN port (Support 10G/5G/2.5G/1G/100M Base-T)
3. 1 x Mini DisplayPort for 2nd Monitor Extension
4. Hardware RAID Controller Inside
5. Support RAID 0/1/10 and JBOD
6. Support 4 x 3.5" or 2.5" SATA Drive
7. Drive Hot-swappable
8. Support 15W (5V/3A) USB Power Delivery
9. Support Windows and Mac
10. Aluminum Chassis and Handle

Applications

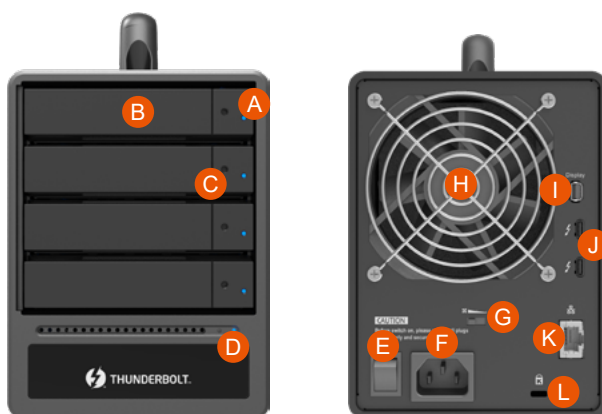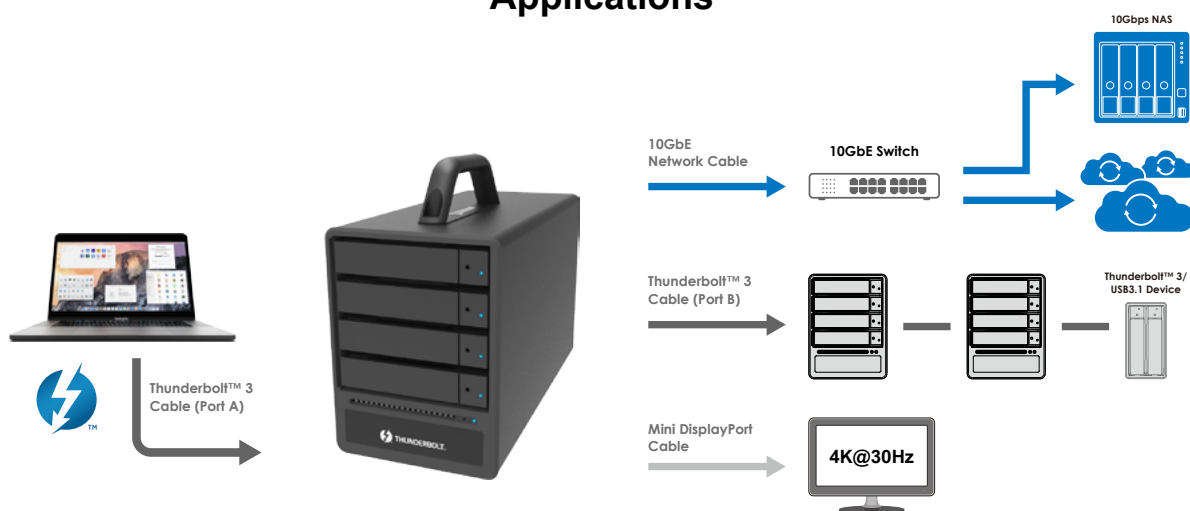

- A. HDD access light
- B. HDD enclosure handle
- C. HDD enclosure keyhole
- D. Power status light
- E. Power switch
- F. Power socket
- G. Fan speed control switch
- H. Fan
- I. Mini DisplayPort
- J. Thunderbolt™ port
- K. RJ45 Ethernet port
- L. Anti-theft lock

Technical Specification

Model No	ST4-TL3+ (Silver) / ST4-TL3+B (Black)
Interfaces	Thunderbolt™ 3 Port x 2(up to 40 Gbps), Support 15W (5V/3A) Power Delivering, Mini DisplayPort x 1, RJ45 Ethernet Port x1 (up to 10 Gbps).
Compatible Drive	4 x 3.5" / 2.5" SATA III HDD/SSD, Support large volume up to 14TB
Storage Mode	RAID 0, 1, 10 and JBOD
Operating System Support	Windows 7 (64-bit), Windows 10 (64-bit), macOS 10.13 and later
Cooling System	9 cm Low noise fan
Electrical and Operating Requirements	* Line voltage: 100-240V AC * Frequency: 50Hz to 60Hz, single phase * Maximum continuous power: 150W * Operating temperature: 32° to 104° F (0° to 40° C) * Storage temperature: -4° to 116° F (-20° to 47° C) * Relative humidity: 5% to 95% noncondensing
Certification	CE / FCC
Size	Height: 166 mm Width: 124 mm Depth: 248 mm
Product Code	ST4-TL3+ - EAN: 4713227440615, UPC: 884826505198 ST4-TL3+B - EAN: 4713227440608, UPC: 884826505181
Carton	4 pcs per carton
Package Accessories	* ST4-TL3+ / ST4-TL3+B x 1 (with removable drive tray enclosed x 4) * Thunderbolt™ Cable x 1 * AC Power Cable x 1 * Handle x 1 * Quick setup guide x 1 * Screws & Keys