

J4076-01




Features :

- Intelligent Enclosure Management
- Individual drive power management
- Tiered storage pool design for Hot data and Cold data
- High speed Transmission Interface for Hot data storage pool
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays (Optional kits for 2.5" drives)

• FRONT VIEW •



• REAR VIEW •

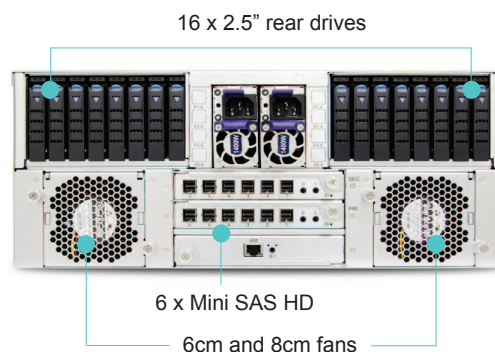

SPECIFICATIONS

General	Number of Expander	2 x External expanders 6 x Internal expanders
	Expander Chip	LSI SAS3x36R + LSI SAS3x48
	Host/Expansion Interface	6 x Mini SAS HD (SFF-8644) per expander module
Drives Supported	Drive Interface	12Gb & 6Gb SAS if using dual expanders 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	SFF 2.5" and 3.5"
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port interface IEM port (Optional)
	LED indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	76
	Cooling	6cm and 8cm fans
	Power Supply	1400W 1+1 hot swap redundant 80+ Platinum
	Power Entry	Dual AC inlet
	Expander Modules	Dual expanders (Optional)

Electrical and Environmental	Universal A/C Input	100~240V AC full range
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H) (with chassis ears)	mm : 480 x 865.25 x 175.75 inches : 18.9 x 34 x 6.9
	Gross Weight (w/ PSU & Rail, w/o Disks)	kgs : 52.76 lbs : 116.31
	Packaging Dimensions (W x D x H)	mm : 603 x 1095 x 408 inches : 23.74 x 43.11 x 16
	Mounting	Standard : Slide rail Option : Cable management kit
For North America, 20" tool-less rail is the standard. Adjustable plate is not included.		