


COSMO 500

500FT Wireless HDMI/SDI Transmission System

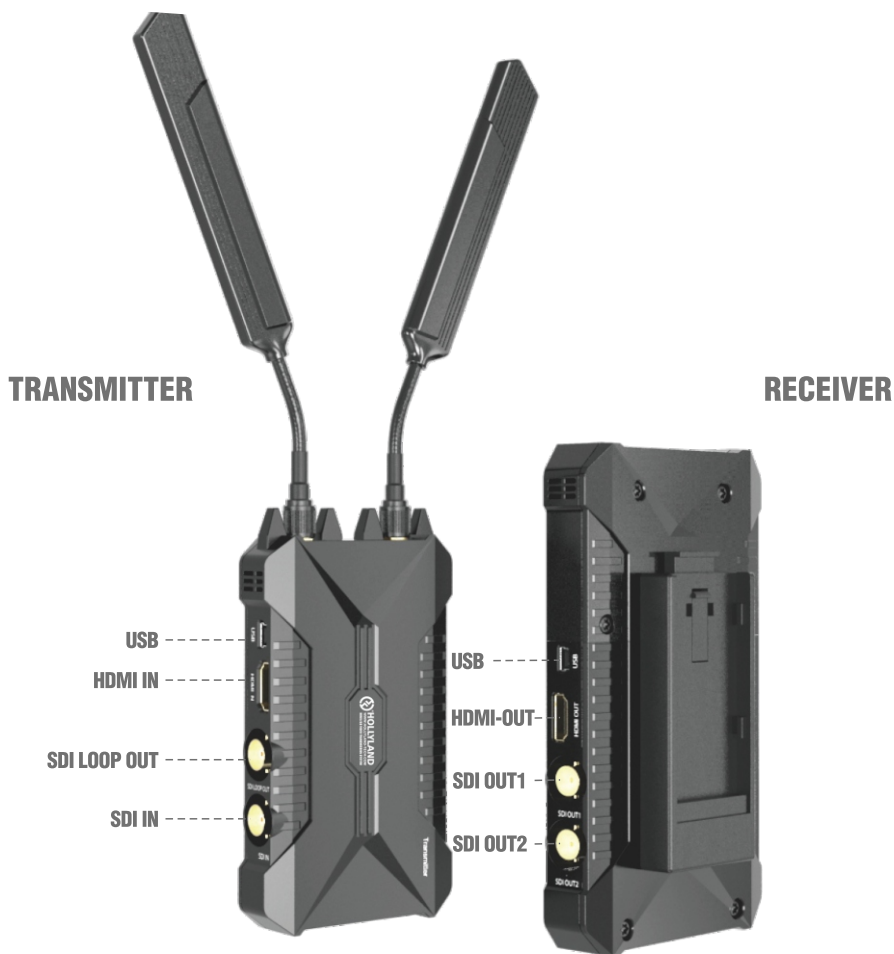

Features

- Guaranteed distance: 500ft
- 3G-SDI In/Loop Out, HDMI In/Out
- No compression, no delay
- True full HD 1080P60;4:2:2
- Point to point & Multipoint
- Support Timecode & Trigger
- 5GHZ Frequency Band
- Working Voltage: 7-36VDC
- Aes-128 encrypted transmission

Highlights



Dual HDMI+SDI



Full HD 1080P



Encryption



No Delay
No Compression

Packing List



5 GHz Antennas*3



Magic Arm*1



Crab Clamp*1



User Manual*1



D-tap to Lemo Cables*2



Hard Case*1



Transmitter*1



Receiver*1



Mushroom Antennas*2



Application



Monitor



Receiver



500ft



Transmitter



Camera

	Transmitter	Receiver
Interface	SDI Input (BNC female) SDI Loop Out (BNC female) HDMI Input (Type A female) 2 Antenna Port (RP-SMA male) DC Input (2pin LEMO female) Mini USB 3.5mm Stereo In	SDI 1 Output SDI 2 Output HDMI Output (Type A female) DC Input (2pin LEMO female) Mini USB
Supply Voltage Range	7~36V DC	7~36V DC
Power Consumption	<6W	<8W
Weight	210g	250g
Size	(L x W x H): 130.5*70.5*21mm, not include antennas and battery plate	(L x W x H): 161*93*23mm, not include antennas and battery plate
Input Video Format	HDMI: 480p60, 576p50, 720p50/59.94/60, 1080i50/59.94/60, 1080p23.98/24/25/29.9/30/50/59.94/60; HDMI Type A SDI: 3G, HD, and SD-SDI (auto-selected), SMPTE-259/274/292/296/372/424/425; 1x BNC; 1x BNC Loopout;	/
Output Video Format	/	HDMI: 480p60, 576p50, 720p50/59.94/60, 1080i50/59.94/60, 1080p23.98/24/25/29.9/30/50/59.94/60; HDMI Type A SDI: 3G, HD, and SD-SDI (auto-selected), SMPTE-259/274/292/296/372/424/425; 2x BNC output;
Input Audio	SDI/HDMI embedded 2 channel 24 bit/48KHZ	/
Output Audio	/	SDI/HDMI embedded 2 channel 24 bit/48KHZ
Frequency Band	5.1~5.9GHz, configurable with China North America, Europe, etc	5.1~5.9GHz, configurable with China North America, Europe, etc
Modulation Mode	OFDM-16QAM	OFDM-16QAM
Transmission Power	Maximum 17dBm	/
Receiver Sensitivity	/	-75dBm
Occupied Bandwidth	40MHz	40MHz

